

PICTURE LIGHT



PICTURE LIGHT



VIVID 45U



VIVID 45L



Signature
Designed by WIP

Picture Light

Specification


Picture light series are high quality aluminum extrusion, using asymmetric beam for wall washing with PMMA lens to control the distribution of light indirectly contact eyesight. The new high CRI 90 with the excellent warm white color and more fantastic color rendering, bringing out and enhancing the picture subject. Picture lights are the perfect option for illuminating wall art, which can create softer modeling, emotional and better uniform. Idea for museum display case, picture display, artworks, etc.

Input Voltage	100-265VAC50/60HZ.	Lens Material	PMMA	Finishing	Black Anodized
Power Factor	>0.90	LED Light Source	Lumileds	Mount	Hanging
Beam Angle	Asymmetric beam for wall washing	CRI	>90	Wire Length	2 M
Work Temperature	-10°C to + 65°C	CCT	2700K	Tube	Aluminium Extrude
LED Life Time	50,000 hrs.	Flicker	<3%	Warranty	1 Year

Model	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Weight (Kg.)	Dimension (mm.)
VIVID 45L	12	1,250	104	0.450	450x175x300.2
VIVID 45U	12	1,250	104	0.450	450x73.8x149





PICTURE LIGHT

Beam Angle

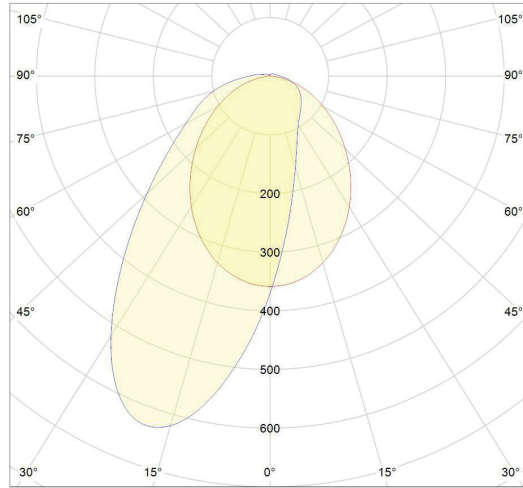

Asymmetric beam for wall washing

Dimension (in mm.)

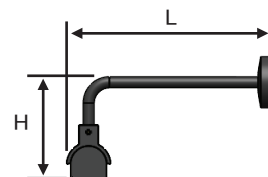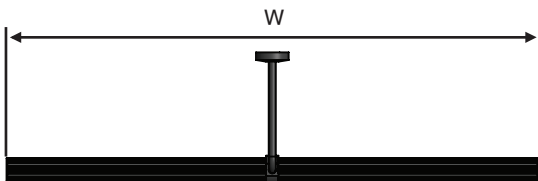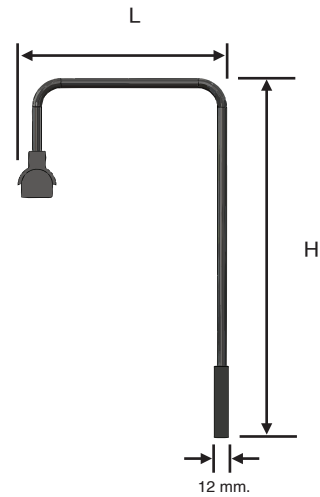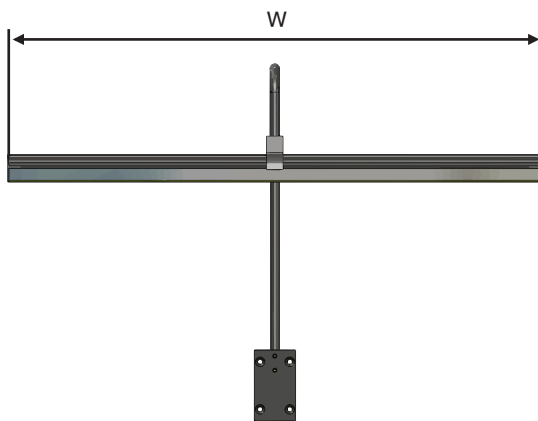

Model	Dimension (mm.)		
	(W)	(L)	(H)
VIVID 45L	450	175	300.2
VIVID 45U	450	73.8	149