

LED TUBE T5

LED TUBE T5



LED TUBE T5



LED T5 16W 2100lm
100-265 VAC 50/60 Hz
DAYLIGHT 6500K
PRODUCT OF THAILAND



Signature
Designed by WIP

T5 LED Tube Internal Driver


Specification

The light shell is G5 standard base lamp and modern design offers a better perspective, Very low power consumption & energy saving, clean and smooth. This is a perfect option for commercial lighting applications, easily replacement for normal fluorescent lamps with an aesthetic streamline design suitable for home lighting, office, hotel, etc. It has convenient installation, operation and maintenance also provided long life time usage.

Input Voltage	100-265VAC50/60HZ.	CRI	>80
Power Factor	>0.95	CCT	3000K, 4000K, 5000K, 6500K
Base Type	G5	Surge Protection	1kV
Work Temperature	-0°C to + 45°C	Weight	177 g.
LED Life Time	50,000 hrs.	Warranty	3 Years

Model	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Total Harmonic Distortion	Length (mm.)	Standard
T5 Internal	16	2,300	144	<15%	1150	
T5 Internal	16	2,100	132	<15%	1150	
T5 Internal	14	2,000	143	<15%	1150	
T5 Internal	14	1,800	129	<15%	1150	

Wiring Diagram

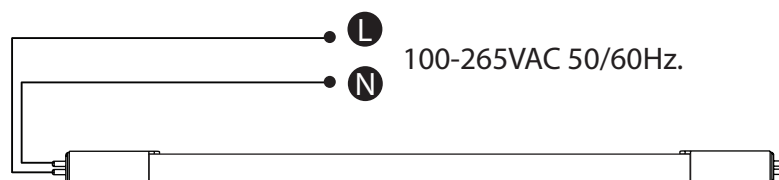

LED TUBE T5



*Signature
Designed by WIP*

T5 LED Tube with External Driver

Specification

The light shell is G5 standard base lamp and modern design offers a better perspective, Very low power consumption & energy saving, clean and smooth. This is a perfect option for commercial lighting applications, easily replacement for normal fluorescent lamps with an aesthetic streamline design suitable for home lighting, office, hotel, etc. It has convenient installation, operation and maintenance also provided long life time usage.

Input Voltage	100-265VAC50/60HZ.	CRI	>80
Power Factor	>0.95	CCT	3000K, 4000K, 5000K, 6500K
Base Type	G5	Surge Protection	1kV
Work Temperature	-0°C to + 45°C	Weight	177 g.
LED Life Time	50,000 hrs.	Warranty	3 Years

Model	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Total Harmonic Distortion	Lenght (mm.)	Standard
T5 External	18	2,500	139	<15%	1150	
T5 External	18	2,300	128	<15%	1150	
T5 External	18	2,100	117	<15%	1150	
T5 External	16	2,300	144	<15%	1150	
T5 External	16	2,100	132	<15%	1150	

Wiring Diagram

