

LED Linear Magnetic Track Light




LED Linear Magnetic Track Light : Linda Series

Specification

Input Voltage	24VDC	Beam Angle	Double Asymmetric beam for aisle and shelf lighting ~ 110° + 100° Wide Beam
Power	5W, 10W, 15W	LED Light Source	Lumileds
CCT	3000K, 4000K, 6500K	LED Life Time	50,000 hrs.
CRI	>80, 90	Work Temperature	-10°C to + 65°C
Lens Material	PMMA	Housing	AL profile
Beam Angle	~60° + 90° beam ~70° + 100° beam ~110° + 100° beam ~40° + 100° Oval beam ~90° + 100° Wide beam Asymmetric beam for washing	Finishing	Powder Coated in black and white
		Mount	Rail Hanging
		Rail	Magnet Track Rail

Model	Power (W)	Input Current	Luminous Flux (lm)	Efficiency (lm/W)	Weight (Kg.)	Dimension (mm.)
WML5	5	0.208A	500	100	0.335	29x284x50
WML10	10	0.417A	1,000	100	0.670	29x564x50
WML15	15	0.625A	1,500	100	1.005	29x844x50

Dimension (in mm.)

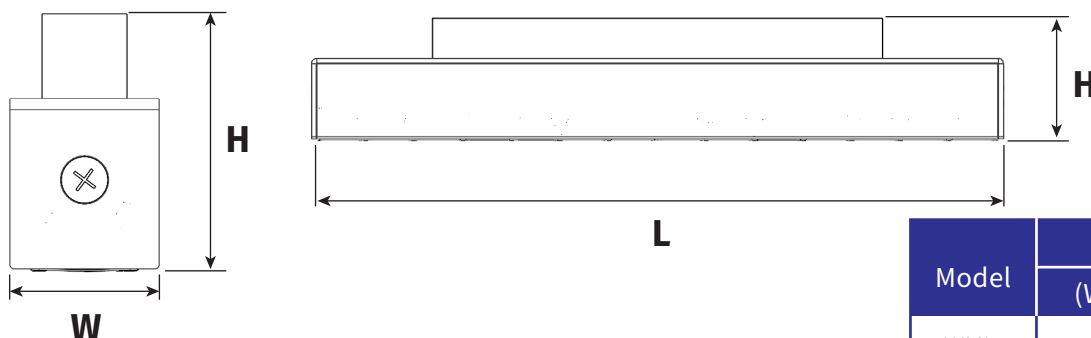


Model	Dimension (mm.)		
	(W)	(L)	(H)
WML5	29	284	50
WML10	29	564	50
WML15	29	844	50




Products of Thailand

LED Linear Magnetic Track Light


Beam Angle




~ 60° + 90° Beam




~ 70° + 100° Beam




~ 110° + 100° Beam




~ 40° + 100° Oval Beam



~ 90° + 100° Wide Beam



Double Asymmetric beam for aisle and shelf lighting ~ 110° + 100° Wide Beam





Asymmetric beam for wall washing



Ledil

Wiring Diagram

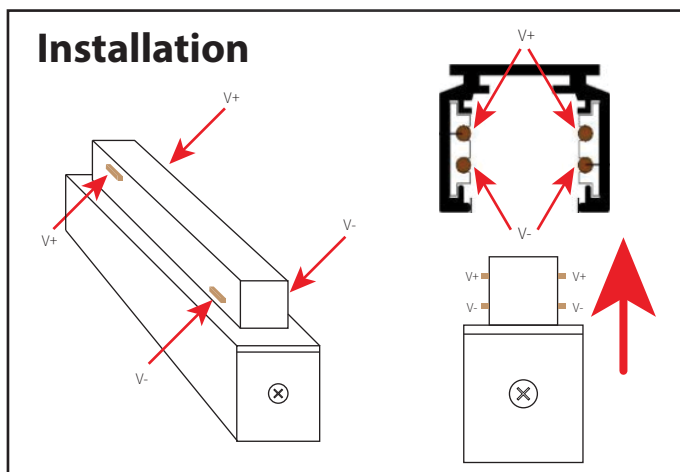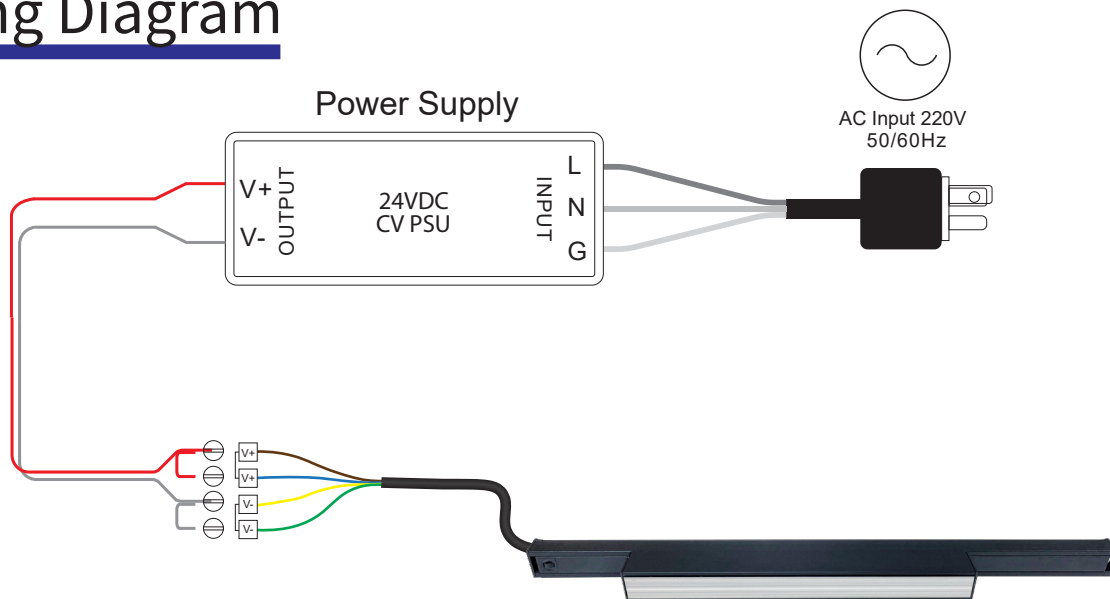

ช่องทางสั่งซื้อ



@wipintertrade wipelectric



02-525-8825-8
02-410-5030-4

W.I.P. บริษัท ดับบลิว.ไอ.พี. อีเล็กทริค จำกัด
W.I.P. ELECTRIC CO., LTD.

55/5 Moo 3, Lampho Soi 3, High Way No. 345, Lampho, Bangbuathong District, Nonthaburi 11110 THAILAND
Tel. (+66)2-525-8825



WWW.WIPELECTRIC.COM




LED Linear Magnetic Track Light


Option



Dimmable Control

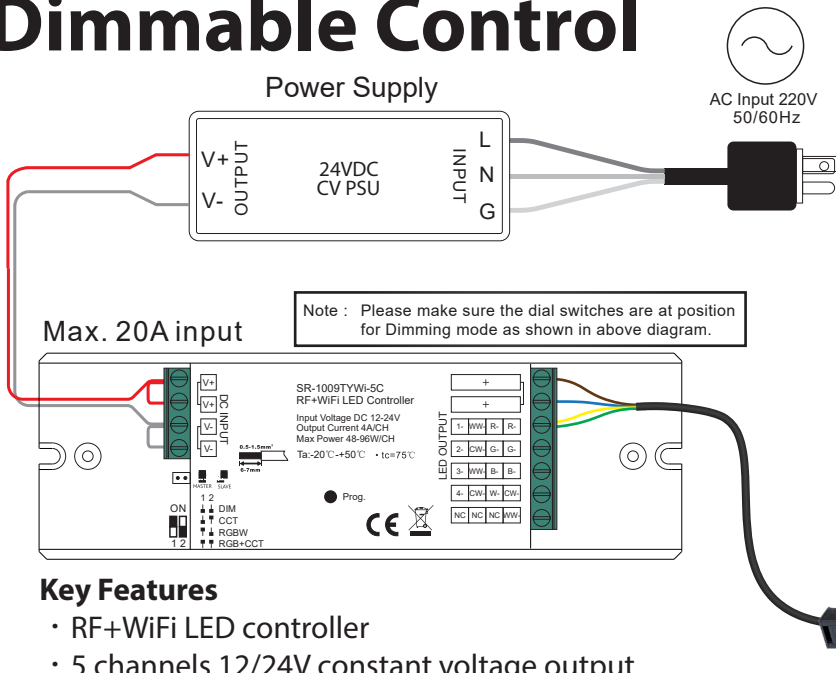

Set up through the Application

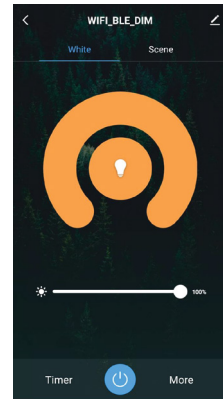

Key Features

- RF+WiFi LED controller
- 5 channels 12/24V constant voltage output
- Max. 4A output per channel
- *RF frequency: 434/869.6/916.5MHz
- Compatible with universal legacy RF remotes
- Waterproof grade: IP20
- DO NOT install with power applied to device
- DO NOT expose the device to moisture



User Manual

RF+WiFi LED Controller



Product Code : 7725
Model : SR-1009TYWI-5C

Monochrome RF Rotary LED Controller



Product Code : 7727
Model : SR-2835DIM



User Manual


ช่องทางการสั่งซื้อ



@wipintertrade wipelectric

02-525-8825-8
02-410-5030-4

Part No.	Input Voltage	Output Current	Output Power	Remarks	Size (LxWxH)
SR-1009TYWI-5C	12-24 VDC	5x4A	5x(48-96)W	Constant voltage	145x46.5x16mm

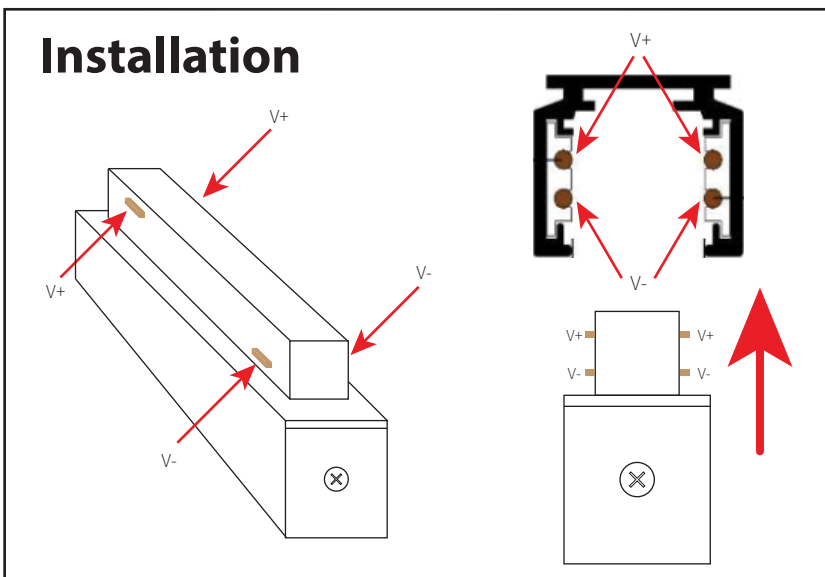


WWW.WIPELECTRIC.COM

LED Linear Magnetic Track Light


Option



Tunable Control

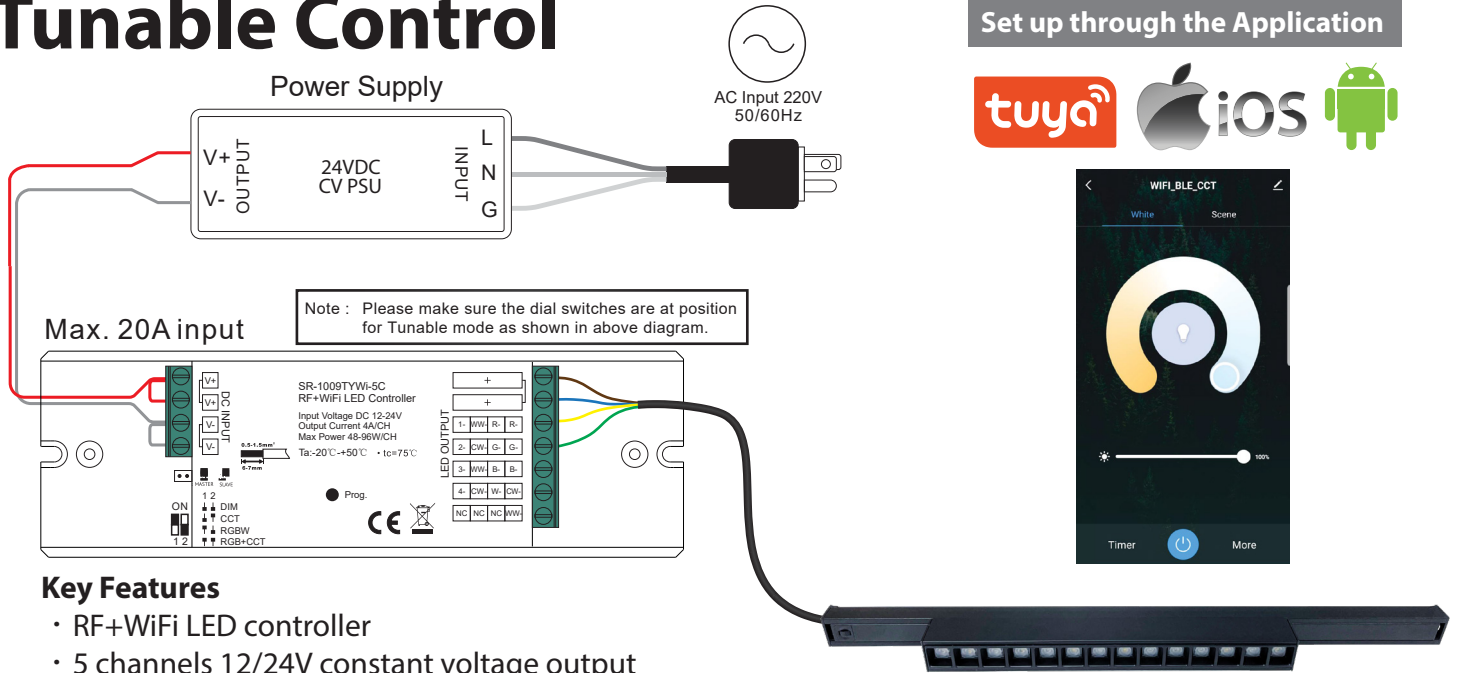

Set up through the Application

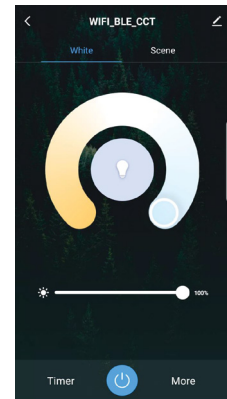

Key Features

- RF+WiFi LED controller
- 5 channels 12/24V constant voltage output
- Max. 4A output per channel
- *RF frequency: 434/869.6/916.5MHz
- Compatible with universal legacy RF remotes
- Waterproof grade: IP20
- DO NOT install with power applied to device
- DO NOT expose the device to moisture



User Manual

RF+WiFi LED Controller



Product Code : 7725
Model : SR-1009TYWI-5C

Dual White RF Rotary LED Controller




User Manual

Product Code : 7728
Model : SR-2835CCT

Part No.	Input Voltage	Output Current	Output Power	Remarks	Size (LxWxH)
SR-1009TYWI-5C	12-24 VDC	5x4A	5x(48-96)W	Constant voltage	145x46.5x16mm

Installation

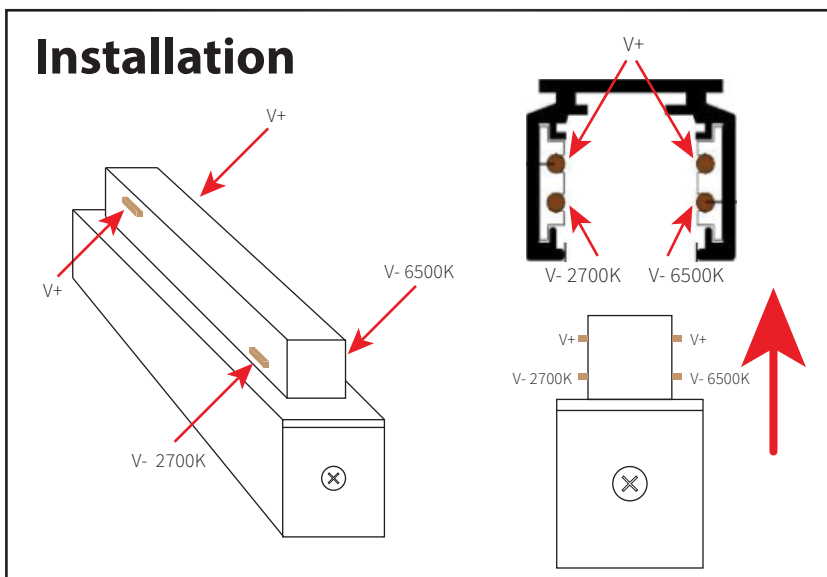

ช่องทางการสั่งซื้อ



@wipintertrade wipelectric

02-525-8825-8
02-410-5030-4

