







RECESSED LED COB TRACK LIGHT FOR MUSEUM

Recessed track light is installed into the ceiling, there is nothing down to interrupt the space. The modern design to save space. It is one choice of premium design solution for indoor and interior lighting to provide better visual illumination a nd display lighting which can helps to increase customer footfall and highlight products. The idea for living room, artwork, countertops, or other room features needed.

Specification

Input Voltage	31-36 VDC	Lens Material	PMMA	Housing	Aluminium
Power Factor	>0.90	Beam Angle	~15° spot beam	Finishing	Black and white
THDi	<10%		~26° spot beam		Powder Coated
Driver	External Driver		~36° wide beam	Panel Cut-Out	55 mm.
Dimmable Dimma	able (On requirement)		~60° widebeam	Warranty	1 Year
Tunable Tuna	ble (On requirement)	LED Light Source	Luminus, Citizen		
Work Temperature	-10°C to + 65°C	CRI	>90		
LED Life Time	50,000 hrs.	CCT 2400K, 2700	K, 3000K, 3500K,		
Unified Glare	No glare	4000K, 5000	K, 6500K, 7800K,		
Flicker	Flicker free	Tunable Wa	rm, Tunable White		

Model	Power (W)	Input Current	Luminous Flux (lm)	Efficiency (lm/W)	Weight (Kg.)	Dimension (mm.)
Recessed Track Light	10	0.045A	1,150	115	0.70	Ø68x155x135
Recessed Track Light	15	0.068A	1,725	115	0.70	Ø68x155x135
Recessed Track Light	20	0.090A	2,300	115	0.70	Ø68x155x135
Recessed Track Light	25	0.113A	2,875	115	0.70	Ø68x155x135
Recessed Track Light	30	0.136A	3,450	115	0.70	Ø68x155x135











Beam Angle


Beam Angle




~15° spot beam



~26° spot beam





~36° wide beam



~60° wide beam

Dimension (in mm.)






Dimension (mm.)					
(W)	(L)	(H)			
Ø68	155	135			









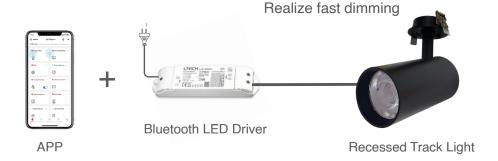

Link up the remote with the LED driver via App to control the driver both by App and remote



Link up the Super Panel with the LED driver via App to control the driver both by App and Super Panel. Also connecting the Super Panel to network allows you to remotely control the driver, cloud scenes and automatic linkage




















Dimmable / Tunable Control



DALI DIMMABLE / TUNABLE CONTROL SYSTEM

Wiring Diagram

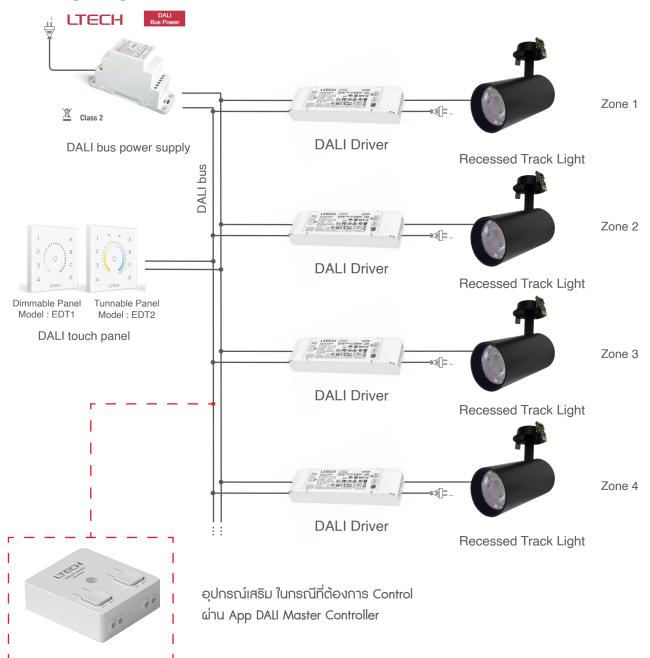

Super LED Dimming Module 2.0 (DALI master controller) Model: CG-D



















Dimmable Control



TRIAC DIMMABLE CONTROL

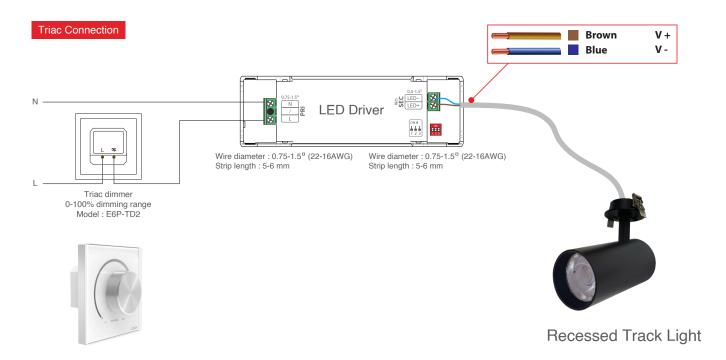

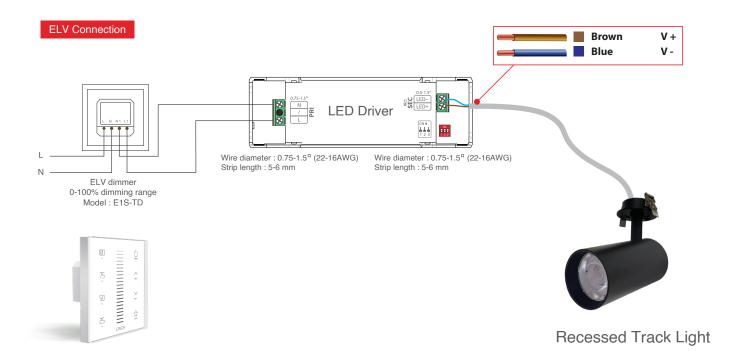















Option

Dimmable / Tunable Control




0/1 - 10 DIMMABLE / TUNABLE CONTROL

DIMMABLE




0-10V Dimmer Model : E610P

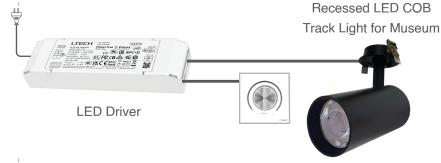




E1S-AD Series Touch Panel (dimming) Model : E1S-AD

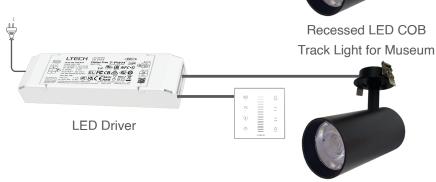

TUNABLE



0-10V Tunable White LED Dimmer Model : E610P-CT

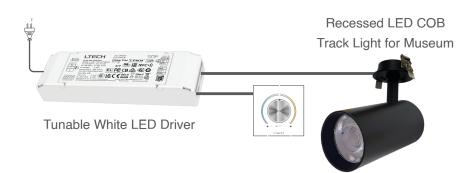



ECT2 CT Touch Panel Model : ECT2

