

LED LOW BAY E27



LED LOW BAY E27



20W



30W



40W



Signature
Designed by WIP

LED LOW BAY E27

Specification

The light shell is die casting aluminum offers a better heat dissipation, high quality with E27 standard base lamp, using a silicone lens for wide area and high bay lighting. Massive lumen output with high intensity peak, which the latest COB technology light source, low power consumption and energy saving. It has a convenient installation, operation and maintenance also provide a long life-time usage. This is a perfect option for commercial lighting. Idea for office, hotel, shopping mall, exhibition hall, warehouse, high ceiling area, etc.

Input Voltage	100-250VAC50/60HZ.	Lens Material	Ledil : Silicone	Surge Protection	1kV
Base Type	E27		High bay Lens	Housing Material	Aluminium
Power Factor	>0.90	LED Light Source	Lumileds		Die Cast
Beam Angle	30°, 60°, 90°	CRI	>80	IP Rating	IP65
Work Temperature	0°C to + 55°C	CCT	2700K, 3000K, 3500K	Warranty	1 Year
LED Life Time	50,000 hrs.		4000K, 5000K, 6500K		

Model	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Weight (Kg.)	Dimension (mm.)
WLB-20	20	2,300	115	0.340	W100 x L100 x H105
WLB-30	30	3,450	115	0.392	W120 x L120 x H119
WLB-40	40	4,600	115	0.450	W150 x L150 x H196


***ข้อควรระวัง** ควรติดตั้งในสถานที่ที่มีอากาศถ่ายเทได้ดีเท่านั้น



Product of Thailand

LENS

Dimension

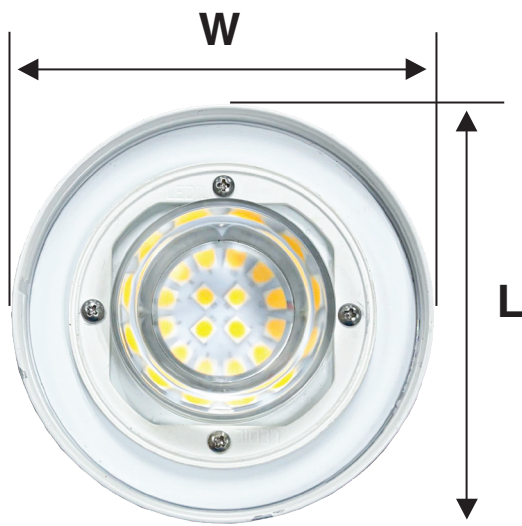

Model	Dimension (mm.)		
	(W)	(L)	(H)
WLB-20	100	100	105
WLB-30	100	100	179
WLB-40	100	100	196