

W-TS221


Time Switch, 24 Hour

- 24 Hr, 20A, One channel, 5 memory locations
- Power reserve of 2 years for continued timekeeping in the event of a mains failure
- Incandescent / halogen lamp load 2300W, fluorescent lamp load 400W, Low energy lamp load 160W
- Symbol operator guidance on the 7 segment display takes the user step by step through the programming routines
- Permanent ON/OFF facility

Other operation

When you want to "ON" while the load is off circle just press " ▽ " for 3 second and release it will be on immediately until the "OFF" time. The load will OFF automatically or press " ▽ " to "OFF"

Operation Front Panel

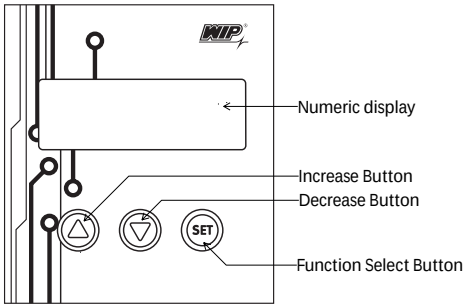


Specification


Feature		
Model	:	W-TS221
Code	:	4800
Supply voltage	:	100-265 VAC 50/60 Hz.
Power consumption	:	2VA
Battery Back-up	:	2 Years
Display	:	7-segment Red LED letter
Time		
Time range	:	24 hr.
Memory locations	:	5 (On/Off)
Number of channel	:	1
Relay output		
Type	:	SPST
Contact rating	:	16A at 250VAC
Operations	:	Mechanical : $2x10^7$ times
		Electrical : $1x10^5$ times
Relay reset	:	Automatic
Environmental		
Operating temperature	:	0° to +55°C
Storage temperature	:	-10° to+70°C
Ambient humidity	:	Max 85%RH
Enclosure		
Back up	:	Lithium battery 3 VDC / CR 2032
Mounting	:	Surface mount
Housing	:	ABS Plastic
Wire fixing	:	W-TS221 : Screw terminal block $4mm^2$
Dimension (mm)	:	69 x 120 x 43
Weight	:	179 g.

Parameter setting

Timer setting

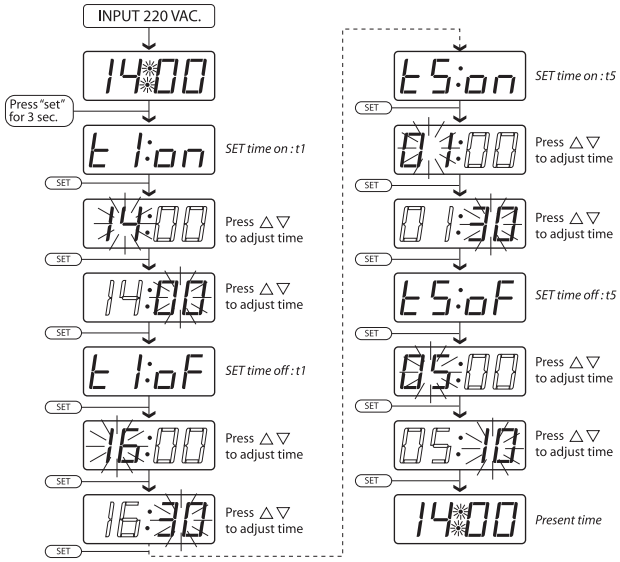

Clock setting



Dimension in mm.

