

W-VCP63

Measuring & Protection Relays


1 Phase Under, Over Voltage and
Over Current Ptotection With AC Volt, AC Amp Meter

คุณสมบัติ

- ตรวจวัดแรงดันไฟฟ้า (Voltage), กระแสไฟฟ้า (Current), กำลังไฟฟ้า (Power) และความถี่ (Frequency) แบบ Real-time
- ป้องกันแรงดันไฟฟ้าสูงเกิน (Over Voltage) และแรงดันต่ำเกิน (Under Voltage)
- ป้องกันกระแสไฟฟ้าเกิน (Over Current) พร้อมตั้งค่ากระแสและเวลาตัดได้
- ตั้งค่าแรงดันตัดและค่าแรงดันคืนกลับได้อย่างอิสระ เพื่อป้องกันการตัด-ต่อซ้ำจากแรงดันแกว่ง
- สามารถกำหนดเวลาหน่วงก่อนตัด และเวลาหน่วงก่อนจ่ายไฟกลับ (Recovery Time) ได้
- ระบบ Auto Reset ช่วยให้โหลดกลับมาทำงานอัตโนมัติเมื่อระบบไฟฟ้ากลับเข้าสู่สภาวะปกติ
- หน้าจอ Digital Display แสดงค่าทางไฟฟ้า พร้อมโหมดแสดงผล Standard, Manual และ Automatic
- รองรับการติดตั้งแบบ Din Rail ขนาดกระทัดรัด เหมาะสำหรับตู้ควบคุมไฟฟ้า บ้านพักอาศัย อาคารพาณิชย์ และงานอุตสาหกรรม

Model	W-VCP63
Supply terminals	N, L
Rate Supply Voltage	AC 220V
Rate Frequency	50/60Hz.
Over Voltage Setting Range	130-300V
Under Voltage Setting Range	80-210V
Voltage Hysteresis	5V
Overvoltage trip delay	0.5s
Voltage accuracy	<1%
Max. Operating Phase Voltage	350V
Over Curent Setting Range	1-63A
Max. Operating Current	63A
Altitude	≤2000m
Ambient Temperature	-25 °C~+50 °C
Permissable Relative Humidity	≤50% at 40 °C (Without Condensation)
Strorage Temperature	-25 °C~+55 °C
Net Weight	159g
Dimension	81*36*66mm


Front-Face Panel

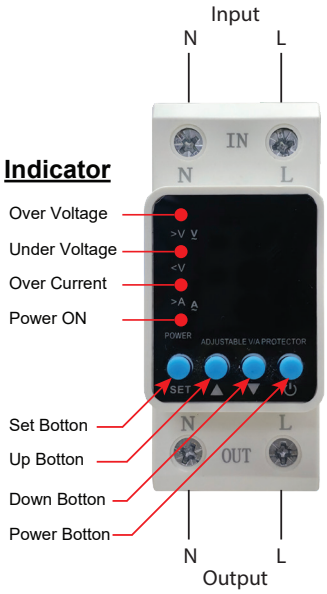

Wiring Diagram



Dimension

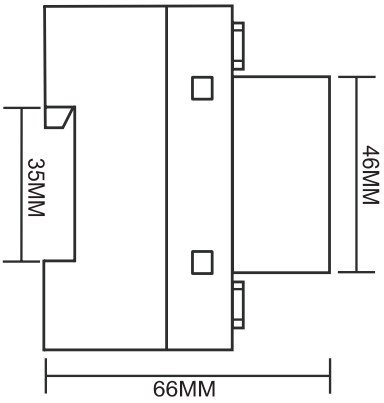

Setup Menu

